


Load Break Isolators

A high quality range of Isolators and switchfuses in IP54 metal enclosures with interlocked pad-lockable handles.

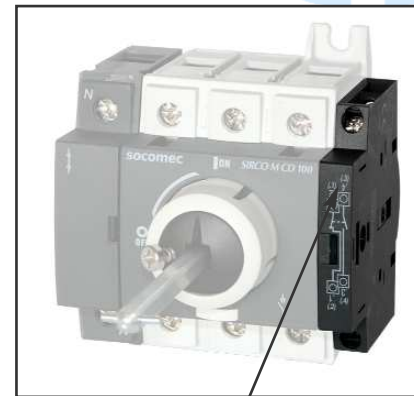

An auxiliary contact (rated 16A) attached to the main isolator unit.

Both isolators & switchfuses are fully AC23 rated for distribution and motor loads.


Spreader boxes and auxiliary contacts are available as accessories.

ISOLATORS METAL IP54				
Description	Dimensions (mm)			Reference
	H	W	D	
3P+N 20 Amp	215	180	135	DS-3020
3P+N 32 Amp	215	180	135	DS-3032
3P+N 63 Amp	215	180	135	DS-3063
3P+N 100 Amp	215	180	135	DS-3100
3P+N 160 Amp	300	270	150	DS-3160
3P+N 200 Amp	300	270	150	DS-3200
3P+N 250 Amp	395	320	175	DS-3250
3P+N 400 Amp	600	450	275	DS-3400
3P+N 630 Amp	600	450	275	DS-3630

Combination Switchfuses

There is generous space for incoming and outgoing cables and a disconnectable solid neutral link.

SWITCHFUSES METAL IP54 (complete with relevant fuses)				
Description	Dimensions (mm)			Reference
	H	W	D	
3P+N 20 Amp	215	180	135	DSF-3020
3P+N 32 Amp	215	180	135	DSF-3032
3P+N 63 Amp	300	270	150	DSF-3063
3P+N 100 Amp	395	320	175	DSF-3100
3P+N 160 Amp	395	320	175	DSF-3160
3P+N 200 Amp	395	320	175	DSF-3200
3P+N 250 Amp	600	450	275	DSF-3250
3P+N 400 Amp	600	450	275	DSF-3400
3P+N 630 Amp	750	550	300	DSF-3630

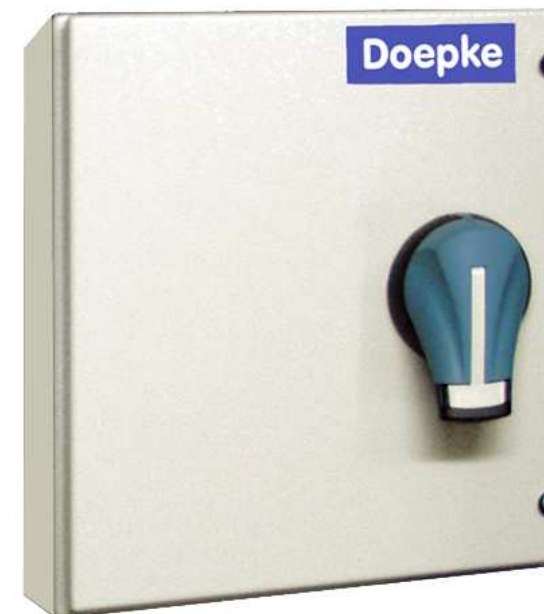

This illustration shows a DS-3250 with an EX03 spreader box attached.



There are three sizes of switch handle depending on the rating of the unit. Each one is ergonomically designed with legible on-off indication. They are all pad-lockable in the 'off' position.

Accessories					
Description	Reference	Dimensions (mm)		Suitable for	
		H	W		D
Spreader Box	EX03	275	320	175	DS-3250, DSF-3100/160/200
Spreader Box	EX04	275	450	275	DS-3400/630, DSF-3250/400
Spreader Box	EX05	275	550	300	DSF-3630
Auxiliary contact	DS-AUXSWN	N/A	N/A	N/A	DS-3020/32/63/100 only
Auxiliary contact	DS-AUXSW2	N/A	N/A	N/A	DS-3160 & 3200 only