

Type A residual current


Regulation 531.3.3 Tripping on:

- ✓ 50Hz sinusoidal AC
- ✓ Pulsating DC
- ✓ Pulsating DC superimposed on smooth DC < 6 mA

Note: Type A RCDs do not detect smooth DC.

Selectivity between RCDs see Regulation 536.4.1.4 (ii)
 Selective/Time-delay characteristics for upstream circuits.

Ordering reference: see below

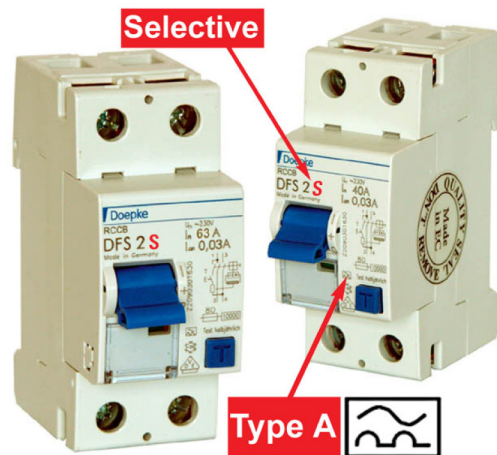

Product Standard: EN61008-1
Approvals: VDE

2 pole 230V RCCB				
Time/Current characteristic: Selective Time-delay				
Modules	Poles	Amps	Sensitivity	Reference
2	2	40	100mA	DFS2-040-2/0.10-AS
2	2	40	300mA	DFS2-040-2/0.30-AS
2	2	40	500mA	DFS2-040-2/0.50-AS
2	2	63	100mA	DFS2-063-2/0.10-AS
2	2	63	300mA	DFS2-063-2/0.30-AS
2	2	63	500mA	DFS2-063-2/0.50-AS
2	2	80	100mA	DFS2-080-2/0.10-AS
2	2	80	300mA	DFS2-080-2/0.30-AS
2	2	80	500mA	DFS2-080-2/0.50-AS
2	2	100	100mA	DFS2-100-2/0.10-AS
2	2	100	300mA	DFS2-100-2/0.30-AS
2	2	100	500mA	DFS2-100-2/0.50-AS
2	2	125	300mA	DFS2-125-2/0.30-AS

4 pole 400V RCCB				
Time/Current characteristic: Selective Time-delay				
Modules	Poles	Amps	Sensitivity	Reference
4	4	40	100mA	DFS4-040-4/0.10-AS
4	4	40	300mA	DFS4-040-4/0.30-AS
4	4	40	500mA	DFS4-040-4/0.50-AS
4	4	40	1000mA	DFS4-040-4/1.00-AS
4	4	63	100mA	DFS4-063-4/0.10-AS
4	4	63	300mA	DFS4-063-4/0.30-AS
4	4	63	500mA	DFS4-063-4/0.50-AS
4	4	63	1000mA	DFS4-063-4/1.00-AS
4	4	80	100mA	DFS4-080-4/0.10-AS
4	4	80	300mA	DFS4-080-4/0.30-AS
4	4	80	500mA	DFS4-080-4/0.50-AS
4	4	80	1000mA	DFS4-080-4/1.00-AS
4	4	100	100mA	DFS4-100-4/0.10-AS
4	4	100	300mA	DFS4-100-4/0.30-AS
4	4	100	500mA	DFS4-100-4/0.50-AS
4	4	100	1000mA	DFS4-100-4/1.00-AS
4	4	125	100mA	DFS4-125-4/0.10-AS
4	4	125	300mA	DFS4-125-4/0.30-AS
4	4	125	500mA	DFS4-125-4/0.50-AS
4	4	125	1000mA	DFS4-125-4/1.00-AS

Have a question? Please contact us today
 Tel: **01628 829133** email: **sales@doepke.co.uk**

